


BEFORE CAPPING, THE CABLE SHALL BE CUT SQUARE AND THE LENGTH OF CABLE TO BE CAPPED SHALL BE THOROUGHLY CLEANED USING A DRY CLEAN CLOTH OR CLEANING FLUID APPROVED BY THE CABLE MANUFACTURER FOR THE PURPOSE.

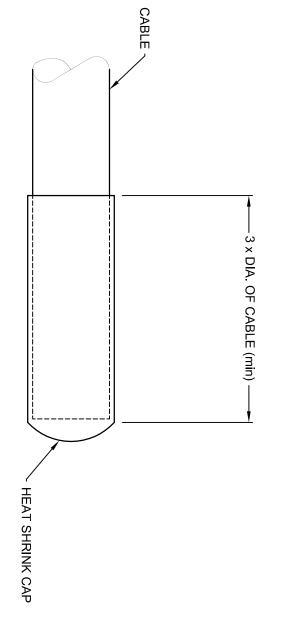

This drawing was generated on computer and must not be manually updated

TYPICAL METHOD OF SEALING UNUSED CABLE ENDS

	THIRD ANGLE PROJECTION DO NOT SCALE	TOLERANCE +- 1 UNLESS OTHERWISE STATED	ALL DIMENSIONS ARE IN MM	ORIGINAL DRAWING SIZE: 297 x 420				
		DRG NO	DATE 01.12.01	DRN C.S.G.	ISSUE	В	2	Α
	^{NO.} NDX1061-00dt		01.12.01	C.S.G.	AME	REDRAWN	MODIFIED AS PER REV SHT	FOR INFORMATION
	Ub'I-UUat	001	DATE 01.12.01	CHKD B.D.	AMENDMENTS		ER REV SHT	TION
	2 of 6	SHT NO	NTS	SCALE	APPD/DATE	BD 13/10/09	BD 07/01/02	BD 09/02/03